



EC NEXXT SERIES

ECLINE
POS TERMINAL

EC ELECTRONICS, LIMITED

EC-NEXXT SERIES


The best balance of design and performance.
Need more powerful performance support? EC-NEXXT meets your needs.



FLEXIBLE ARCHITECTURES FOR POS PERIPHERAL



EC-NEXXT




EC-NEXXT-S



Specification

Processor	Intel® J6412 Quad Core Intel® Core i3-1115G4 up to 4.10G Dual-Core Intel® Core i5-1135G7 up to 4.20G Quad-Core	Operating System	Windows 10, Windows 10 IOT, Windows 11, Linux (ubuntu not less than 20.04)
Memory	DDR4 – 4GB (up to 32GB)	Display Size	15.6 Inches
Storage	M.2 128GB (up to 512GB)	Resolution	1920 x 1080 (16 : 9)
Consumption	35W (MAX)	Brightness	250cd/m ²
Housing Material	Aluminum	Backlight Type	LED
Power Input	DC 12V/5A	Contrast Ratio	800:1
Operating Temperature	-10°C to 50°C	Response Time	25ms
Storage Temperature	-20°C to 60°C	Viewing Angle	80°/80°/70°/70° (Up/ Down/ Left/ Right)
Humidity	10% to 85%	Touch	10-point Projected Capacitive Touch
Optional Peripherals	VFD / iButton / MSR Second Display 10.1" (Optional Touch)	Safety	FCC / CE / RoHS
EC-NEXXT			
Net Weight	4.6 KG	Gross Weight	5.0 KG
Overall Dimensions	366W x 425H x 196D mm	Packing Dimension	475W x 375H x 110D mm
EC-NEXXT-S			
Net Weight	4.6 KG	Gross Weight	-
Overall Dimensions	366W x 425H x 189D mm	Packing Dimensions	-

I/O Ports

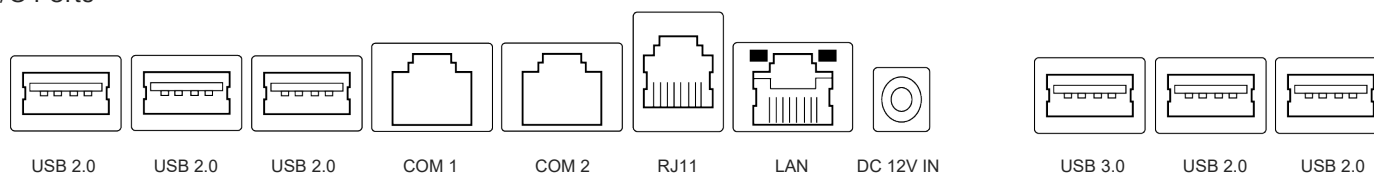


*All rights reserved. All specifications are subject to change without notice.


保留隨時更改本文中產品相關描述之權利，若有更改恕不另行通知。

EC-NEXXT SERIES

Dimension for EC-NEXXT

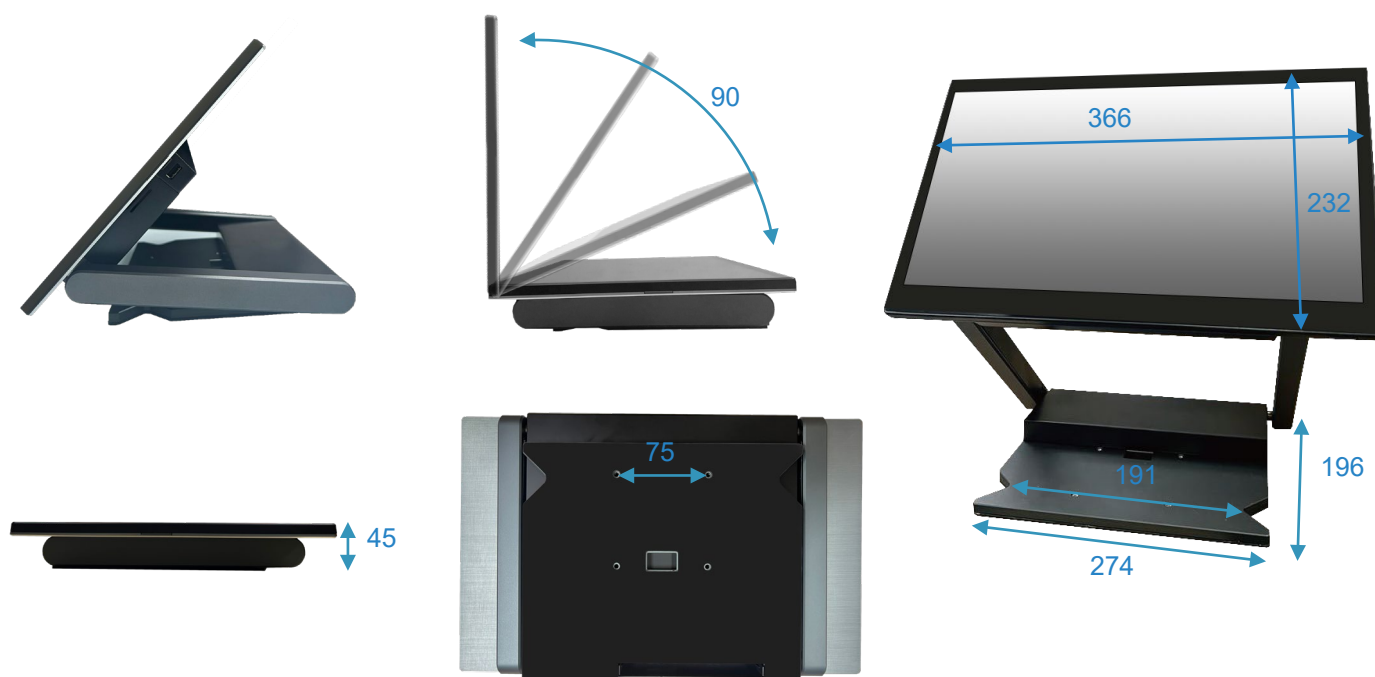

Dimension for EC-NEXXT-S

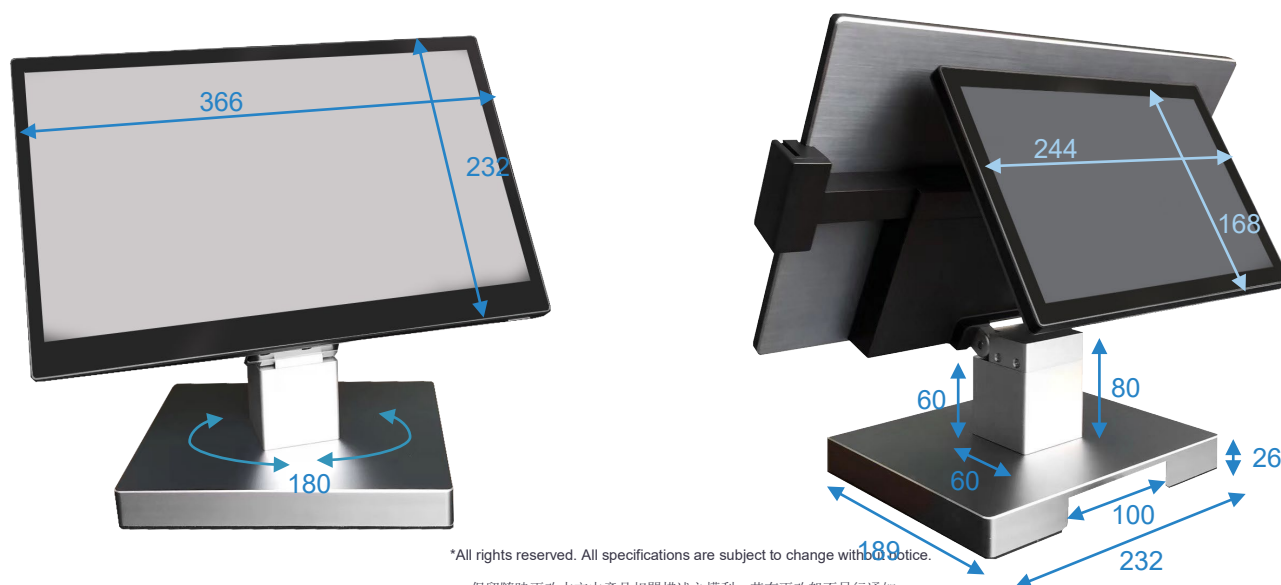

*All rights reserved. All specifications are subject to change without notice.

保留隨時更改本文中產品相關描述之權利，若有更改恕不另行通知。